

# ODYSSEY™ Ultimizer™



## CHARGERS

### FINALLY, IT'S HERE!

The range of 12V Ultimizer™ chargers has been custom designed to maximize the performance you can get from your ODYSSEY™ battery. These sophisticated chargers are powerful enough to quickly charge the battery and safe enough to leave them connected to the batteries indefinitely without damaging them.


### WHY BUY ULTIMIZER™ CHARGERS?

- Designed specifically for ODYSSEY™ batteries only
- UL 815G listed
- Complies with FCC Rules where applicable
- Three-step charge profile ensures fast, complete and safe charge
- Continuous trickle charge keeps battery fully charged during extended periods of non-use
- Sophisticated sequential charging technology keeps triple bank chargers lightweight and compact
- Full range covers all ODYSSEY™ batteries.

Charger model	Description	Dimensions, in.			Weight, lbs.	ODYSSEY™ PC model
		Length	Width	Height		
<b>OMAX-6A-1B</b>	6A single bank with quick disconnect and clamps	7.25	7.00	2.75	2.6	310, 535, 545, 625, 680
<b>OMAX-12A-1B</b>	12A single bank	9.75	7.5	3.25	5.0	310, 535, 545, 625, 680, 925
<b>OMAX-25A-1B</b>	25A single bank	9.75	7.5	3.25	6.0	310, 535, 545, 625, 680, 925, 1200, 1500/34, 1500/34M, 1500/34-78, 1700, 1700/65
<b>OMAX-50A-1B</b>	50A single bank	11.0	9.0	5.0	10.0	310, 535, 545, 625, 680, 925, 1200, 1500/34, 1500/34M, 1500/34-78, 1700, 1700/65, 2150/31, 2150/31M, 2250
<b>OMAX-40AS-3B</b>	40A triple bank sequencer	11.0	9.0	5.0	13.0	310, 535, 545, 625, 680, 925, 1200, 1500/34, 1500/34M, 1500/34-78, 1700, 1700/65, 2150/31, 2150/31M
<b>OMAX-50AS-3B</b>	50A triple bank sequencer	11.0	9.0	5.0	13.0	310, 535, 545, 625, 680, 925, 1200, 1500/34, 1500/34M, 1500/34-78, 1700, 1700/65, 2150/31, 2150/31M, 2250

**SPECIFICATIONS:**

- **Input:** 120V, 60 Hz, single phase; current varies with model
- **Output:** Three-step charge profile (see figure below)

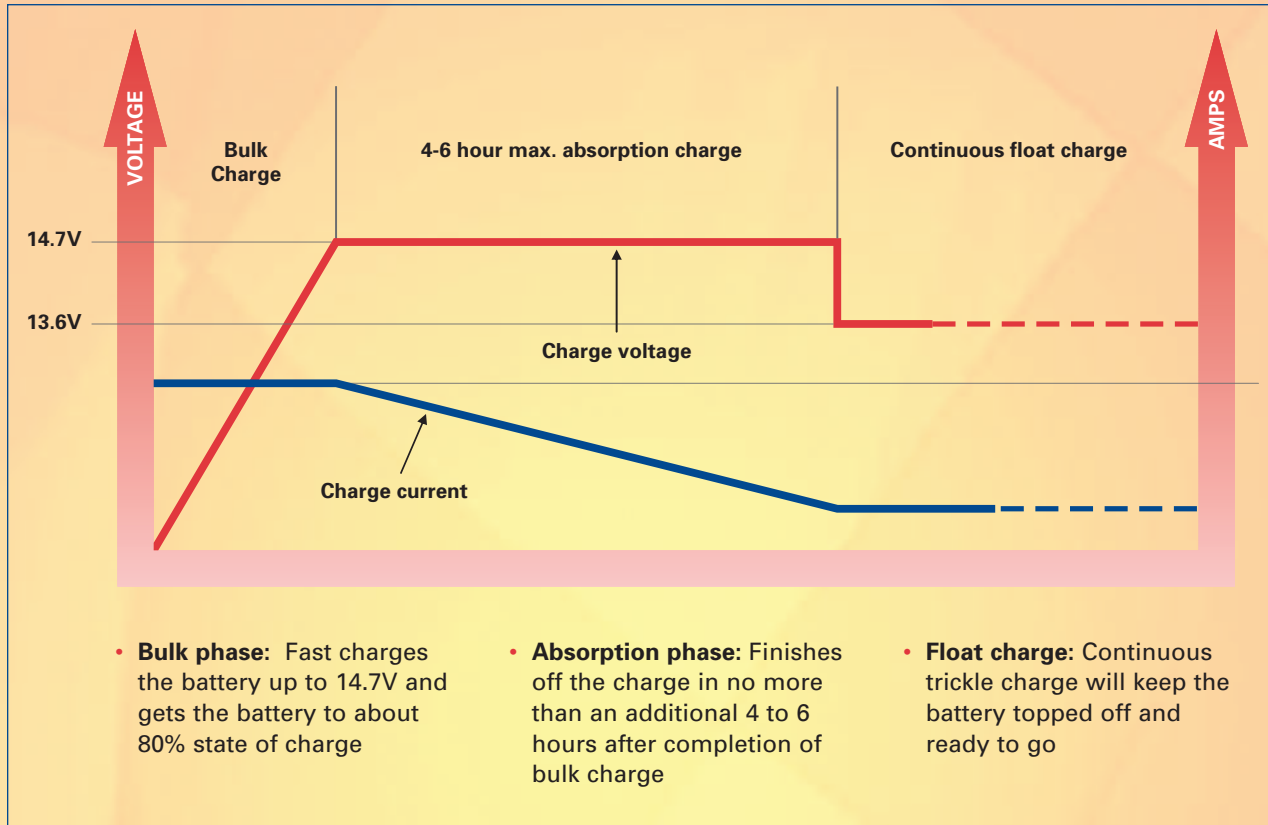

Publication No. US-ODY-ULT-003 - April 2007 - Subject to revisions without prior notice. E.&O.E.



**EnerSys Energy Products Inc.**  
 617 North Ridgeview Drive,  
 Warrensburg,  
 MO 64093-9301, USA  
 Tel: +1-660-429-2165  
 Fax: +1-660-429-1758

**EnerSys Limited**  
 Rake Lane,  
 Clifton Junction,  
 Manchester M27 8LR UK  
 Email: odyssey.sales@uk.enersys.com  
 Tel: +44 (0)161 727 3952  
 Fax: +44 (0)161 727 3805

**EnerSys Australia Pty Ltd**  
 7 Walker Place,  
 Wetherill Park, NSW,  
 Australia 2164  
 Tel: + 61 (0) 29756 1870  
 Fax: + 61 (0) 29757 4537  
 Toll-free: 1-800-550-153

Distributed by:

**Website: [www.odysseyfactory.com](http://www.odysseyfactory.com)**

Printed in USA  
 © 2007 EnerSys. All rights reserved.  
 Trademarks and logos are the property of  
 EnerSys and its affiliates unless otherwise noted.